

Standard Features

■ Motor

1/2 HP, 120V, single-phase, intermittent-duty, open type motor with instant reverse and internal automatic reset thermal overload protection (60Hz). Removable without affecting limit switch settings. Also available with 50Hz motor, consult inside sales.

■ Reduction

First step in reduction 5L/B V-belt drive, additional steps by chain and sprockets. Input shaft is 5/8", supported by precision ball bearings. Output shaft is 1" with 1/4" keyway, supported by ball bearings. Output shaft speed: 36 rpm.

■ Clutch

Adjustable friction type, positioned on input shaft, easily adjustable from outside.

■ Drive

#41 roller chain with a 41B12 sprocket for the operator drive shaft. Door sprocket selected for a door travel of 6"/s to 12"/s.

■ Brake

Mechanical brake.

■ Manual Operation

Hoist-a-matic® self-engaging hoist (floor level engagement device is not required to operate) for manual chain operation.⁽²⁾ An electrical interlock automatically disconnects power to the motor operator when chain hoist is engaged. Hoist on right is standard. Hoist handing must be specified when ordering.

■ Electrical Enclosure

All electrical components are in a Nema 1 enclosure. Hinged electrical enclosure cover with stable opened position. Control box may be lifted to access reduction sprockets and chain.

■ Limit System

Rotary-type oil-impregnated steel cams, commercial grade switches. Limit shaft is supported by self-lubricating bronze bushings for increased precision. Remains in time when there is a manual operation or after the motor has been removed.

■ Accu-cam® Feature

Precise and quick one-handed adjustment of the limits.

■ Corrosion Protection

Frame and control enclosure protected by baked on, long lasting enamel finish. Polymer control box cover. All shafts protected by yellow chromate coating.

■ Mounting

Wall, hood, or shelf mounted on the right or on the left of the door. For indoor use only.

■ Shipping Weight

Approx. 68 lb - 31 kg.

■ Warranty

2 years.

⁽¹⁾ For properly balanced rolling steel doors with less than 50 lb of imbalance, rolling sheet doors, vinyl doors or equivalents. For larger rolling doors, we recommend using an electrically activated drum-band type solenoid brake, see Mechanical Modifications.

⁽²⁾ The hoist is designed for light and limited use in the event of troubleshooting only.

Opera-MH

Jackshaft Operator
Medium-Duty Hoist

Hoist-a-matic®

Self-engaging chain hoist with automatic cut-off

Accu-cam® Limit Feature

For precise and quick one-hand limit setting adjustments

Hinged Cover with Stable Opened Position

For easy access to components and wiring



The Opera-MH is a medium-duty operator designed for use on standard, high and vertical lift sectional doors, small rolling doors and grilles, as well as rolling sheet doors.⁽¹⁾

The operator can be wall, hood, or shelf mounted on either side of the door. It incorporates the patented Hoist-a-matic®, a self-engaging chain hoist for manual operation, which simplifies operation and installation.

The operator is offered with the Electronic Control Board (BOARD 070) and MONITORED external entrapment protection devices (ANSI/CAN/UL 325 compliant).

Control Options

■ ECB Units (BOARD 070)

24Vdc relaying circuit with a 40VA class II transformer, non-volatile memory. Features available: On-board radio receiver, 1.5s delay on reverse, programmable maximum run timer, mid-stop, timer to close (suspension possible from floor level), built-in cycle-counter, independent input loop terminal, advance close system, test buttons, reverse wiring detection and door lock sensor. Operating mode selectable on site: C2, B2, D1, E2, T or TS.

■ "M" Version



Provides the monitoring of Primary External Entrapment Protection Devices. Includes monitored photoelectric cells (PHOTO 070 standard). In this mode, Ancillary Entrapment Protection Devices (optional) may be used to supplement primary entrapment protection, such as non-monitored photoelectric cells, 2-wire non-monitored sensing edges and pneumatic sensing edges. Certifications: ANSI/CAN/UL 325.

Note: ANSI/CAN/UL 325 apply to units intended to be used in ordinary locations in accordance with the Canadian Electrical Code, Part I and the National Electrical Code, NFPA 70, respectively.

Main Options

■ Control Accessories

Angled terminal strip allows for the connection of 3-button stations (one supplied with the operator), non-monitored sensing edges / photoelectric cells / light curtains external radio receive, ceiling pull switches, key switches, loop detectors, LED strips, external interlocks, universal auxiliary output module. Optional Manaras Internet Control™ (MIC) available. 2A fuse protected 24Vdc output is available for accessory power supply. Nema 4/12 or Nema 4X protected monitored photoelectric cells upgrade available.

■ Mechanical Accessories


Wall or hood mounting bracket, chain spreader, etc. Consult inside sales.

■ Mechanical Modifications

Left hand chain hoist, #50 roller chain and sprocket on final drive, hand crank, and limit shaft speed-up, etc. Consult inside sales.

Dimensions

Clearance: Side room required 15" (380 mm)
Maximum Door Height: 14' (4260 mm)

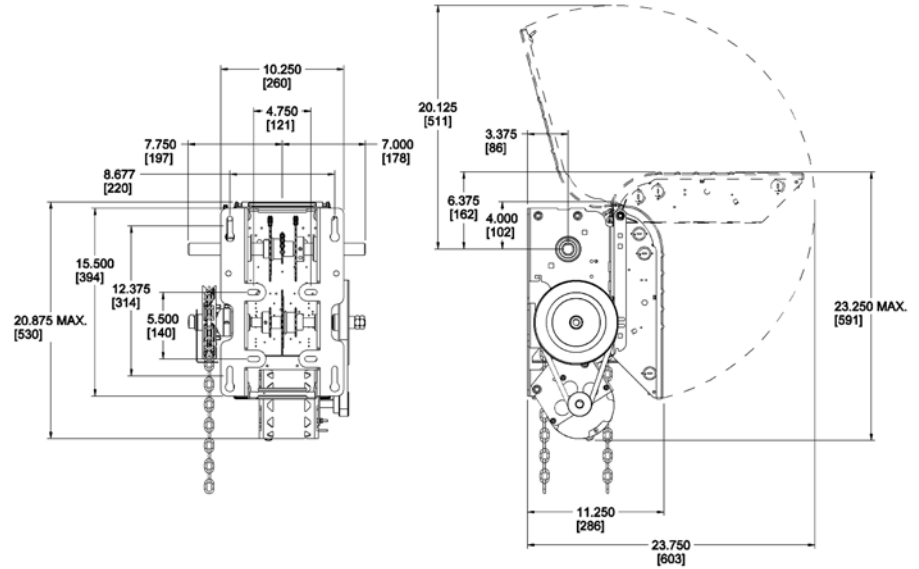

Motor Selection

Maximum Size of Door in Square Feet

Horse Power	Rolling Doors					Sectional Doors					General Guideline
	Insulated Steel	16 ga. Steel	Steel Grilles 20 ga. Steel	Alu. Door 22 ga. Steel	Alu. Grilles 24 ga. Steel	Steel 18 ga. ins.	Steel 18 ga. 20 ga. ins.	Wood Steel 20 ga. 22 & 24 ga. ins.	Aluminum Steel 22 & 24 ga.	Fiberglass	
1/2	-	160	200	275	320	120	160	250	275	290	

Operator Range

Current Consumption (Amp.)

Horse Power	120V 1 Ph	General Guideline
1/2	6.0	

Manaras-Opera reserves the right to make specifications or design changes without prior notice.

©2024 9141-0720 Québec Inc. All rights reserved. Reg. T.M. of 9141-0720 Québec Inc. UL logo is a Reg. T.M. of UL LLC. | CSA logo is a Reg. T.M. of CSA Group.

136, av. Oneida,
Pointe-Claire (Québec)
Canada H9R 1A8

1-800-361-2260
manaras.com

